


Dimensions
WEATHER PROTECTED I
SOLID SHAFT
FRAME: 9600PH

TYPES: RV-4 & RVE-4

PRINTS
9600
RV-4, RVE-4

Typical Dimensions For Reference Only

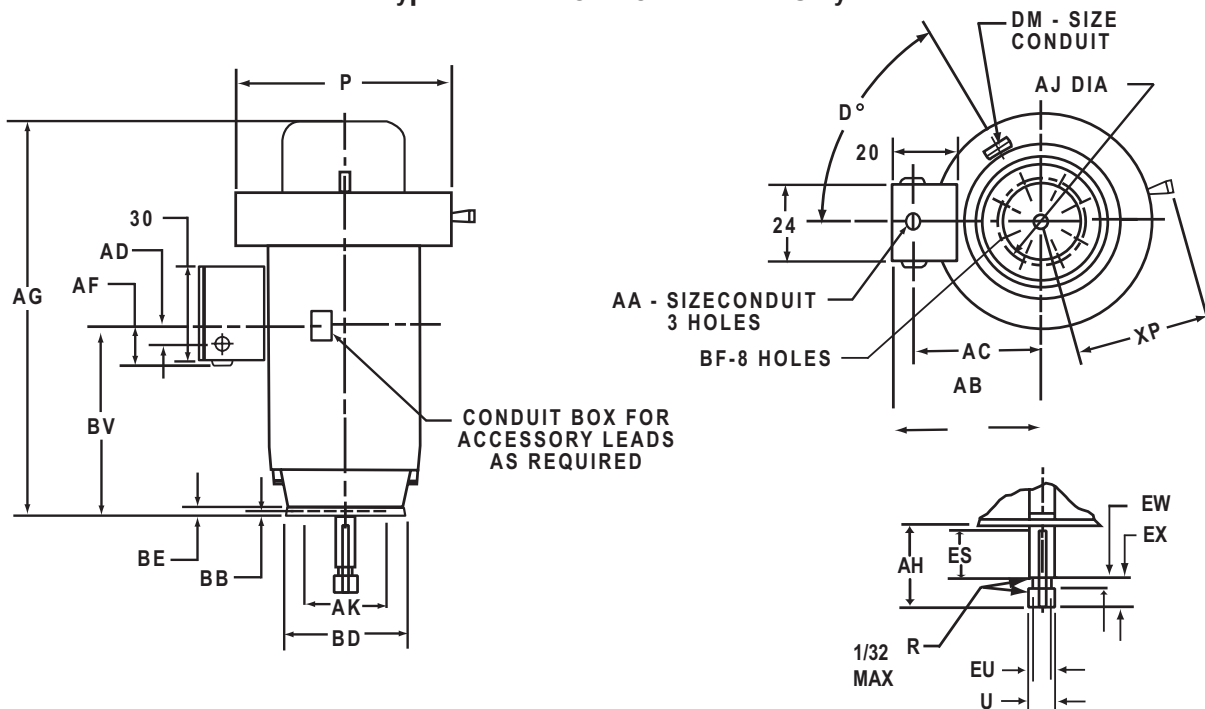

ALL DIMENSIONS ARE IN INCHES

FRAME	XO	P	AG	BV
9601	37.125	62.625	82.75	35.75
9602			86.75	39.75
9603			90.75	43.75
9604			94.75	47.75
9605			98.75	51.75
9606			102.75	55.75
9607			106.75	59.75
9608			110.75	63.75

FRAME	BD	BE	AJ	BF	AK +.007	BB
9600PH	42	1.75	39	1.125	33.750	0.25

FRAME	HP	VOLT	AA	AB	AC	AD	AF	D°	DM
9600	ALL	ALL	3.5	47.375	41.375	11	17.937	90	1

U -.001	AH ±.062	ES MIN	EU -.005	EX -.005	EW +.002	SQ KEY
5.500	11.500	9.000	4.750	1.500	0.75	1.25

TOLERANCES	
FACE RUNOUT	.009 F.I.R.
PERMISSIBLE ECCENTRICITY OF MOUNTING RABBIT	.009 F.I.R.
PERMISSIBLE SHAFT RUNOUT	.003 F.I.R.
MAXIMUM SHAFT END PLAY	.010

1: ROUGH DIMENSIONS MAY VARY BY $\pm 1/4"$ DUE TO CASTING AND OR FABRICATION VARIATIONS.

