


TYPES: RV & RVE

Typical Dimensions For Reference Only

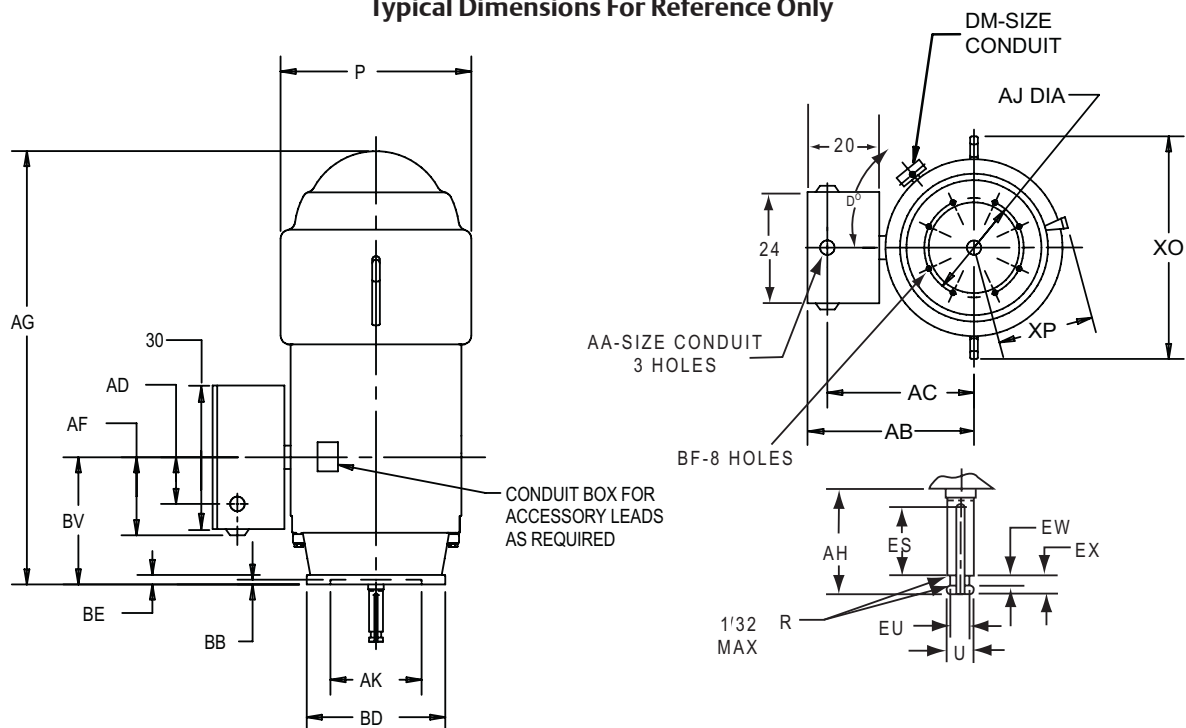

ALL DIMENSIONS ARE IN INCHES

FRAME	XP	XO	P	AG	BV
8006	25	48.25	45	92.062	33.75
8007				96.062	37.75
8008				100.062	41.75
8009				104.062	45.75
8010				108.062	49.75
8011				112.062	53.75

U -.001	AH ±.062	ES MIN	EU -.005	EX -.005	EW +.002	SQ KEY
4.875	10.000	7.500	4.125	1.500	.750	1.25

FRAME	BD	BE	AJ	BF	AK +.007	BB
8000PH	42	1.75	39	1.125	33.750	0.25

FRAME	HP	VOLT	AA	AB	AC	AD	AF	D ⁰	DM
8000	ALL	ALL	3.5	43.437	37.437	11	17.937	45	1

TOLERANCES	
FACE RUNOUT	.009 F.I.R.
PERMISSIBLE ECCENTRICITY OF MOUNTING RABBIT	.007 F.I.R.
PERMISSIBLE SHAFT RUNOUT	.003 F.I.R.
MAXIMUM SHAFT END PLAY	.010

1: ROUGH DIMENSIONS MAY VARY BY $\pm 1/4"$ DUE TO CASTING AND OR FABRICATION VARIATIONS.

